


## PP 阻燃管

### PP Frconduit

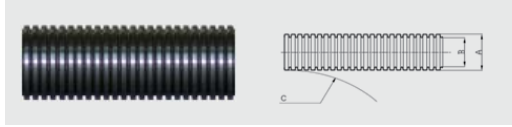


材质：聚丙烯  
 颜色：黑色 / 灰色 / 橙色  
 温度：-20°C~+90°C  
 防护等级：IP68(与接头及密封圈配合使用)  
 特性：耐酸碱，不含卤素，柔韧性，抗疲劳  
 应用：有酸碱腐蚀性的环境

Material: Polypropylene  
 Colour: Black(BL)/Grey(GR)/Orange(OR)  
 Temperature range: -20°C~+90°C  
 Protection Degree: IP68(For use with RL fitting & seal)  
 Properties: Acid and alkali resistance, halogen free, high fatigue life, high flexibility  
 Applications: Acid and alkali resistance environments

软管尺寸 Conduit size	型号 Part no.	外径 A (mm) OD	内径 B (mm) ID	最小弯曲半径 C (mm) Min bend radius	包装 (米 / 卷) Packing
10	PP-V0-10	10.0	6.5	15	200
13	PP-V0-13	13.0	10.0	20	100
16	PP-V0-16	15.8	12.0	30	100
21	PP-V0-21	21.2	16.8	40	100
28	PP-V0-28	28.5	22.0	50	100
34	PP-V0-34	34.5	28.0	60	50
42	PP-V0-42	42.5	36.0	80	25
54	PP-V0-54	54.5	46.5	100	25

## PP 开口型管

### PP Slit Conduit

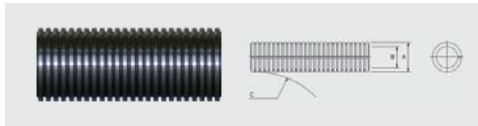

材质：聚丙烯  
 颜色：黑色 / 灰色 / 橙色  
 温度：-20°C~+90°C  
 防护等级：IP68(与接头及密封圈配合使用)  
 特性：耐酸碱，不含卤素，柔韧性，抗疲劳  
 应用：有酸碱腐蚀性的环境

Material: Polypropylene  
 Colour: Black(BL)/Grey(GR)/Orange(OR)  
 Temperature range: -20°C~+90°C  
 Protection Degree: IP68(For use with RL fitting & seal)  
 Properties: Acid and alkali resistance, halogen free, high fatigue life, high flexibility  
 Applications: Acid and alkali resistance environments

软管尺寸 Conduit size	型号 Part no.	外径 A (mm) OD	内径 B (mm) ID	最小弯曲半径 C (mm) Min bend radius	包装 (米 / 卷) Packing
10	PP-10-S	10.0	6.5	15	200
13	PP-13-S	13.0	10.0	20	100
16	PP-16-S	15.8	12.0	30	100
21	PP-21-S	21.2	16.0	40	100
28	PP-28-S	28.5	22.0	50	100
34	PP-34-S	34.5	28.0	60	50
42	PP-42-S	42.5	36.0	80	25
54	PP-54-S	54.5	46.5	100	25