


# 71/72

## 连齿线槽 Wiring duct



H (mm)	W (mm)	型号 Part no.	( A-Bmm)				包装 (米 / 箱) Packing
			6-6	8-8	8-10	10-10	
40	40	WDL-4040	•				80
	60	WDL-4060	•				64
50	25	WDL-5025	•				100
	35	WDL-5035	•				100
	*45	WDL-5045	•				80
	50	WDL-5050	•				80
	60	WDL-5060	•				64
	80	WDL-5080	•				48
60	25	WDL-6025		•			80
	40	WDL-6040		•			64
	60	WDL-6060		•			48
	80	WDL-6080		•			36
65	33	WDL-6533		•			80
	45	WDL-6545		•			80
	65	WDL-6565		•			48
80	25	WDL-8025			•		60
	35	WDL-8035			•		60
	40	WDL-8040			•		48
	45	WDL-8045			•		48
	50	WDL-8050			•		48
	60	WDL-8060			•		36
	80	WDL-8080			•		36
100	100	WDL-80100			•		24
	120	WDL-80120			•		24
	35	WDL-10035				•	48
	40	WDL-10040				•	48
	50	WDL-10050				•	48
	60	WDL-10060				•	36
130	80	WDL-10080				•	24
	100	WDL-100100				•	24
	120	WDL-100120				•	24
	100	WDL-130120				•	12
150	100	WDL-150120				•	12

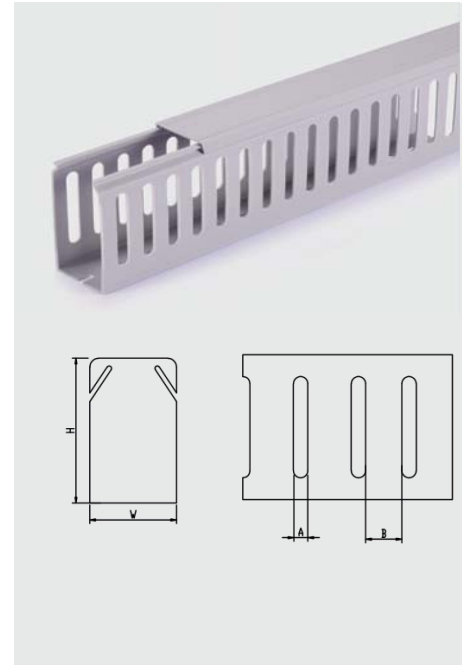

材质：采用低烟无卤环保硬质 PVC

Material: Low smoke, halogen free, rigid PVC

颜色：灰色（白色、蓝色、黑色等可特殊定制）

Colour: Grey(White, Blue and Black colors are available)

温度：-25°C~+70°C

Temperature range: -25°C~+70°C

阻燃等级：UL94-V0

Flame-retardant: UL94-V0

特性：反扣式槽盖与槽体设计合理，组合后绝不脱落，且接合面平滑，不易割伤手及擦损配线。配线槽 70 度内不易断裂、变形、变色、装配省时便利。出线孔低，组合容易，拆卸简单，易于配线。

Properties: Reasonable design in cover and body makes the duct durable, smooth connection protects hands and wires. Duct can keep its original state in 70° degree. Complete accessibility and easiest method of inserting or removing wires. It is easy to install and remove.